MIYUKI Co., Ltd.
mail:e-mail@miyuki-beads.co.jp
web:www.miyuki-beads.co.jp/englith
Note: Re-sell this instruction is prohibited


MIYUKI CO, LTD.

Right angle weave" Berry beads Bracelet"

Right angle weave" Berry beads Bracelet"

Finished size...About 20.5cm (1.62 ft.)
Tools...Scissors • Ruler • Stopper bead(11/0 seed bead or Delica bead) • Pliers

1) Leave the 40cm thread tail at the beginning, then make the base of the bracelet with right angle weave. After weaving, leave the thread end. (Don't cut thread ends.) (Use two 1.7m (5.5ft.) lengths of beading thread.)

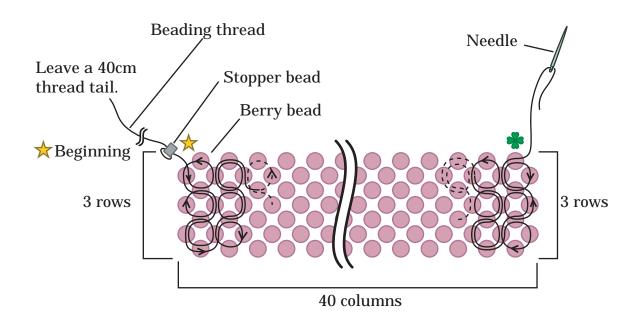


Right angle weave" Berry beads Bracelet"

mail:e-mail@miyuki-beads.co.jp web:www.miyuki-beads.co.jp/englith Note: Re-sell this instruction is prohibited

2) Use the thread ends you left at 1) to connect a metal component, then end the thread. Remove the stopper bead from the thread tail at the beginning, then


connect the other end of bracelet to the metal component

\*Thread in the picture looks loose, but actually it needs to be tight. Lightened beads in the picture are already strung. The needle doesn't show here.

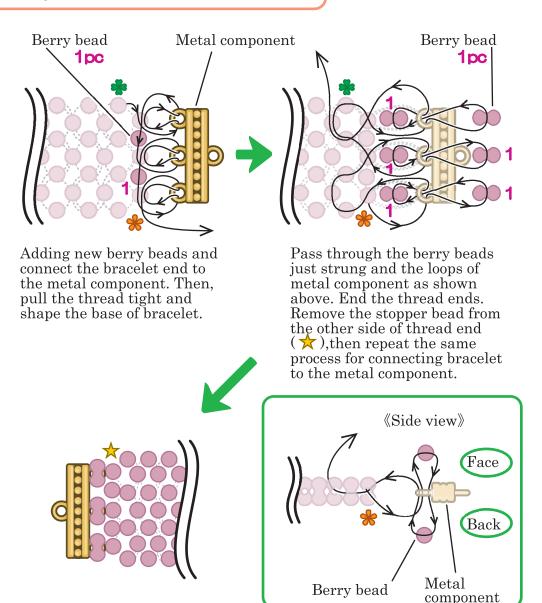

## Basics How to end thread


To end a thread, weave back into the beadwork, following the existing thread path and two or three times between beads as you go. Weave through a few beads after the last knot, and trim the thread.

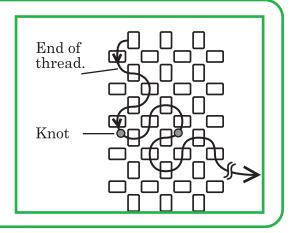

## **Berry Beads instruction**

Right angle weave" Berry beads Bracelet"


3) Use new 1.7m of beading thread to put flower-shaped beads and metallic flowers on the base of the bracelet as in the picture. End the both thread ends.

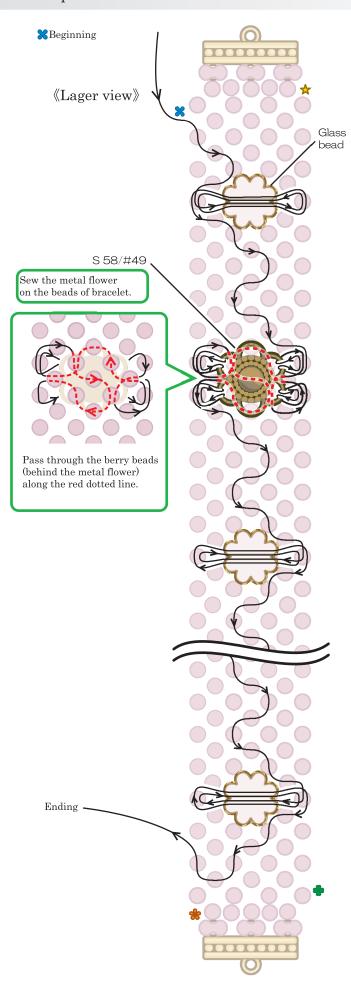

## **Berry Beads instruction**

Right angle weave" Berry beads Bracelet"

4) Connect the metal components to the clasp with rings.

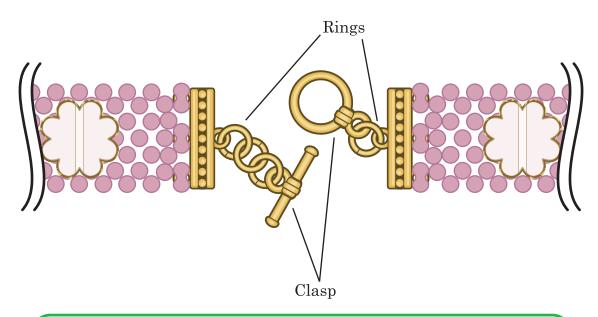

## Open/Close ring

Push one end forward and the other in the opposite direction as shown right.

